



Harkness Screens UK
Tel +44 (0) 1438 725200
Fax +44 (0) 1438 344400

E-Mail sales@harkness-screens.com
www.harkness-screens.com

Harkness Screens USA
Tel +1 (540) 370 1590
Fax +1 (540) 370 1592

**MATT PLUS MPS
FRONT PROJECTION SCREEN
DATA SHEET**

Document Ref DS-080 Issue 4 July 2008



Matt Plus MPS front projection screens build on the leading technology of Harkness Screens. The surface has smaller diameter perforations (less than half of standard perforation) but a very high density of holes to provide the ultimate surface for close viewing conditions, coupled with excellent acoustic performance. MPS can be used in digital cinema where larger perforations can interfere with pixel generated images. The screens are seamless.

Application

Matt Plus MPS screens are recommended for a wide range of applications where optimum acoustic performance is required including:

• Preview Theatre • Digital Cinema • Screening Room • Home Theatre • Roller Screen

Surfaces suitable for use in flat or curved frames and roller screens.

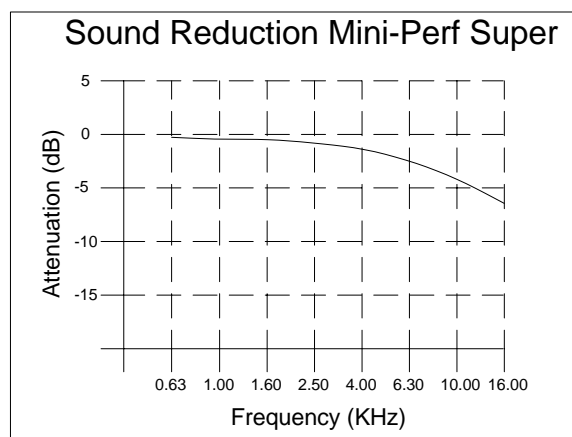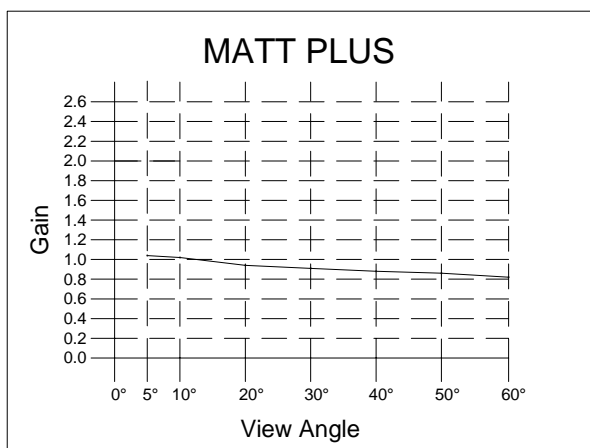

General Detail

View Distance Minimum of 1.5m (5')
Maximum Size 5.2m x 2.2m (17' x 7' 2")
Perforation Size Ø0.50mm (0.020")
Perforation Density 5.1%
Weight 0.50kg/m² (0.10lb/ft²)
Eyelet Spacing 150mm (6") nominal

Typical Packing

Rolled in a cardboard tube.

Surface Edging Options

- Web and eye (grommet). Triple fold web integral with surface
- Preformed pipe pocket any size on any side
- Cloth web and fixings (snaps) for press stud frames
- Straight sides or shaped to special order
- Cut square (unfinished edge)

Fire Retardancy Certification to the following standards:

UK BS 5867 Part 2
USA NFPA 701
Canada CAN ULC S102-2
Germany B1
France M1
Italy Class 1
Spain M2
Japan BT-08-050 (*regulation requires certification by importing company*)
Australia

Despatch/Storage

Screens should normally be transported and stored at temperatures between 5°C and 30°C (40°F and 85°F), with relative humidity less than 80%.

If screens are very cold (e.g. following air transport) then they must be allowed to warm up before unpacking, otherwise cold cracking may occur. Screens should be installed within a maximum of 2 months of shipping. Packages should be handled with care to avoid damage.

Installation

The following principles should be followed when installing Harkness Matt Plus MPS screen surfaces:

- The auditorium should be clean with no building works taking place.
- Installation should be at ambient temperature (20/24°C-68/75°F).
- Care should be taken to avoid the screen coming into contact with sharp objects during installation.
- Excessive loads should not be placed on any specific point of the screen.
- Use of cotton gloves is recommended.
- The viewing surface should not be touched (the rear of the screen is identified by the product label).
- The surface should not be creased during installation.

Care and Maintenance

The general environment where the screen is installed should be kept reasonably clean to avoid dirt and dust build-up. Screens can be periodically cleaned using a soft brush or cloth, doing this vertically with limited pressure. Under no circumstances should the screens be made wet or cleaned with any material containing bleach or other chemicals.

In the interest of product enhancement, Harkness Screens reserves the right to introduce modifications or alterations without notice